



The new degree of comfort.™



Residential Gas  
Fury Water Heaters

# Fury® gas water heaters feature the Guardian System – engineered to exceed ANSI standards for flammable vapor ignition resistance

## Efficiency

- .58 - .62 EF
- More hot water at a low operating cost

## Performance

- FHR: 50 to 90 gallons for natural gas
- Recovery: 30.3 to 50.5 gallons at a 90 degree rise, based on model

## Guardian System™ & Sensor

- Exclusive air/fuel shut-off device
- Maintenance free – no filter to clean

## Low Emissions

- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements

## Longer Life

- Patented magnesium anode rod with resistor protects the tank from rust

## High Altitude Compliant

- All models certified up to 6,000 ft. above sea level
- Some models certified up to 10,200 ft. above sea level, check factory for listings

## Plus...


- Easy to light – no matches required
- EverKleen™ patented system fights sediment build-up
- Brass drain valve and temperature and pressure relief valve are included
- Standard replacement parts

## Warranty

- 6-Year limited tank and parts warranty\*
- With ProtectionPlus™ the 6-year limited tank warranty becomes 10-year

\*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.

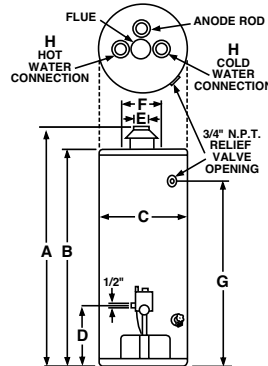

## Fury

29, 30, 38, 40 and 50-Gallon Capacities  
Up to 50,000 Btu/h  
Natural and LP Gas



\*LEED Point = 1

TYPE	DESCRIPTION		FEATURES				ROUGHING IN DIMENSIONS (SHOWN IN INCHES)								ENERGY INFO.			
	GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° RISE		FIRST HOUR DEL. G.P.H.	HT. TO VENT A	TANK HT. B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	WATER CONN. CNTR. F	HT. TO SIDE T&P G	WATER CONN. H	SHIP. WT. (LBS)	ENERGY FACTOR NAT.	AVG. ANN. OPER. COST NAT.
			NAT.	LP	NAT.	LP	NAT.											
TALL	29	22V30F	32	30	32.3	30.3	50	59-3/4	56-3/8	16-1/8	14-1/2	3	8	50-3/4	3/4	100	0.62	\$294
	40	22V40-36F1	36	—	36.4	—	67	61-1/2	58	17-3/4	14-1/2	3 or 4	8	53	3/4	120	0.59	\$309
	40	22V40F1	38	32	38.4	32.3	73	61-3/4	58-3/8	18-1/8	14-1/2	3 or 4	8	52-1/4	3/4	120	0.59	\$309
	38	42V40F	40	34	40.4	34.3	68	61-1/2	57-3/4	19-3/4	14-1/2	3 or 4	8	52-1/4	3/4	125	0.60	\$304
	40	42VR40-40F <sup>1</sup>	40	34	40.4	34.3	68	63-1/4	59-3/4	21	14-1/2	3 or 4	8	53-1/2	3/4	135	0.62	\$294
	50	42VR50-40F <sup>1</sup>	40	36	40.4	36.4	83	62-1/4	58-3/4	23	14-1/2	3 or 4	8	52-1/2	3/4	165	0.62	\$294
	50	22V50F1	38	36	38.4	36.4	90	61-1/2	58-1/4	20-1/8	14-1/2	3 or 4	8	51-3/8	3/4	130	0.58	\$315
	50	42V50-40F	40	36	40.4	36.4	82	61-1/2	58	21-3/4	14-1/2	3 or 4	8	52-1/2	3/4	150	0.58	\$315
	50	42V50-50F	50	—	50.5	—	81	62	58	21-3/4	14-1/2	3 or 4	8	52-1/2	3/4	150	0.58	\$315
SHORT	30	22V30S-30F	30	—	30.3	—	50	49-3/4	46-1/4	19-3/4	14-1/2	3	8	40-1/4	3/4	98	0.61	\$299
	40	42VR40S-40F <sup>1</sup>	40	36	40.4	36.4	72	53-7/8	50-1/2	23	14-1/2	3	8	44	3/4	135	0.62	\$294
	40	22V40SF	36	34	36.4	34.3	72	52-3/4	49-3/8	20-1/8	14-1/2	3	8	42-3/4	3/4	130	0.59	\$309
	40	42V40SF	40	36	40.4	36.4	72	53-7/8	50-1/2	20-1/8	14-1/2	3 or 4	8	44	3/4	130	0.59	\$309
	50	42V50SF	40	36	40.4	36.4	84	54-1/4	49-3/4	22-1/4	14-1/2	3	8	44	3/4	158	0.59	\$309

Specify LP gas when ordering. Add "P" suffix to the model number. Example: 42VR40-40PF.

Energy Factor and Average Annual Operating Costs based on D.O.E. (Department of Energy) test procedures. D.O.E. national average fuel rate natural gas \$1.218/therm; LP \$1.87/gallon.

*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*

Rheem Water Heating • 101 Bell Road  
Montgomery, Alabama 36117-4305 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT